

Visual Cooking 1.06







SmartTouch® display

Standard display

VISUAL COOKING OVEN

6-tray combi oven (1/1 GN, 65 mm U) or 5-tray combi oven (1/1 GN, 85 mm U) or 5-tray bakery oven (400x600 EN, 85 mm L)

Electricity or gas

Injection or hybrid steam (mix of injection steam and steam from the steam generator)

SmartTouch® or Standard selection interface

2-piece rack

z-piece ruck

Integrated hand shower

DIMENSIONS & WEIGHT

Width 897 mm
Height, table model 815 mm
Height, with stand 1492 mm
Depth, excl handle 831 mm

Weight, electric oven 130 kg net / 150 kg packed Weight, gas oven 135 kg net / 155 kg packed

STANDARD SPECIFICATIONS ELECTRICAL OVEN

Voltage 3 NAC 400 V Wattage 9 kW Power consumption 13 A

Pre-fuse According to local regulations

Water connection 3/4", outside
Drain Ø50 mm, outside


STANDARD SPECIFICATIONS GAS OVEN

Voltage 1 NAC 230 V Wattage 1 kW Power consumption 8.5 A

Pre-fuse According to local regulations

Water connection 3/4", outside
Gas connection 3/4", outside
Drain Ø50 mm, outside

Power, hot air 13 kW Power, steam generator 11 kW

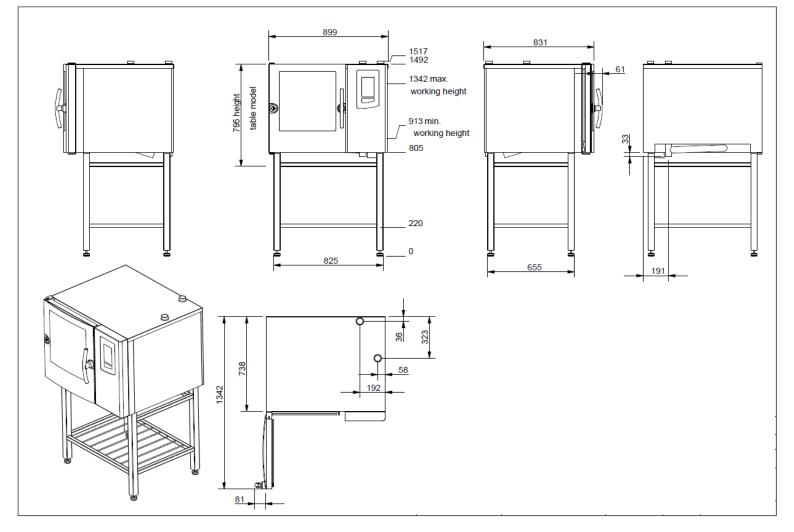

Cooking modes for Touch and Standard models:

- Hot air (convection)
- Steaming
- Low-temperature steaming
- Forced steaming
- CombiSmart® humidity control, 10 steps
- Cook & Regen
- Proving with automatic humidification
- Preheating
- Automatic cooling function
- Manual humidity pulsing
- Reversing, adjustable fan with 9 speeds

Additional cooking modes for Touch models:

- SmartChef®, automatic cooking
- ClimaOptima®, automatic humidity control
- Automatic humidity pulsing
- RackTimer® with up to 20 timers
- Cool-down function
- Delta-T
- Cook \$ Hold

Additional features for Touch models:

- Let's Cook Cloud Solution
- CombiWash® automatic cleaning system
- HOUNÖ PROTECT start kit
- Multipoint temperature probe
- Chef's recipe collection
- Baker's recipe collection
- Favourites selection
- Quick Select Recipes (QSR)
- Advanced RackTimer for tailored menu handling
- Keypad for temperature adjustment
- HACCP quality control, 60 days in PDF format
- **USB** connection



Tested quality and safety:













